



It's Time to Make Gate Safety a PrioritySM

Monitored Resistive Wrap Around Edges WR4/WR5/WR6 WS4/WS5/WS6



The Most Advanced Monitored Resistive Wrap Around Edges

The **Round and Square Profile Wrap Around Edges** are part of the complete line of LiftMaster[®] Monitored Resistive Edges. They easily secure directly on to a round or standard square post, ensuring long-lasting stability and reliability without adding a channel.

FEATURES:

- Pressure-sensitive edge sends signal to stop and/or reverse gate operation when sensing obstructions
- Integrated diagnostics with our 2016 UL 325 Gate Operators
- Compatible with wireless or hardwired slide gate applications
- Used in virtually any environment

LIFTMASTER PERIMETER ACCESS SYSTEM

LiftMaster's full line of safety entrapment protection accessories are tested and proven to work together with our gate operators as a complete UL 325 compliant system.




LiftMaster[®]

Monitored Resistive Wrap Around Edges

WR4/WR5/WR6 WS4/WS5/WS6

COMMON ENTRAPMENT ZONES

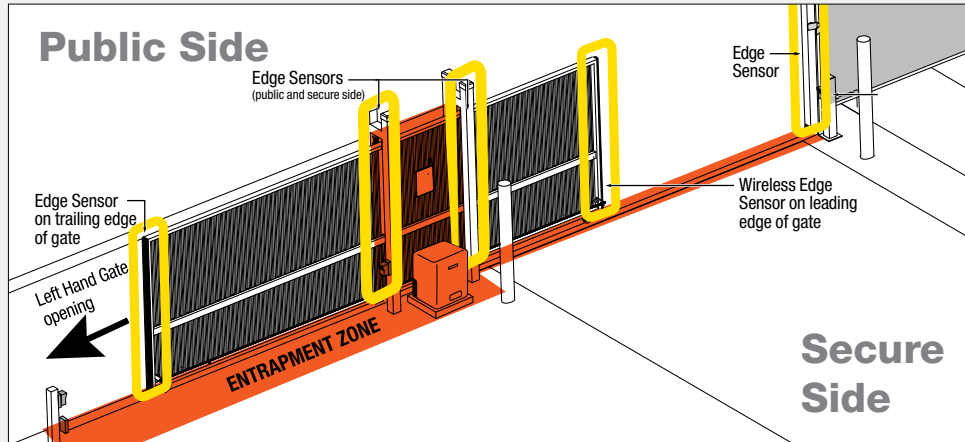

■ Possible Entrapment Zones ■ Edge Sensor: Monitored Wireless Edge Kit and Monitored Profile Edge

Slide Gate Applications Only

FEATURE	MONITORED RESISTIVE EDGES WRAP AROUND STYLE - SQUARE (WS4 / WS5 / WS6)	MONITORED RESISTIVE EDGES WRAP AROUND STYLE - ROUND (WR4 / WR5 / WR6)
Outdoor Rating:	IP65	
Temperature Range:	-40°F to 149°F (-40°C to 65°C)	
Product Dimensions:	3.8" W x 2.6" H for 2 in. square posts	3.8" W x 2.8" H for 1.6 - 2.3 in. round posts
Lengths:	4 ft., 5 ft., 6 ft.	
Cable Length:	39 in.	
Electrical Diagram:	2-wire N.O. configuration	
Material:	TPE Rubber	
Shipping Weight:	WS4 8.8 lbs. WS5 11 lbs. WS6 13.2 lbs.	WR4 8.8 lbs. WR5 11 lbs. WR6 13.2 lbs.
Compatibility:	All LiftMaster® Gate Operators with burgundy boards, Wireless Edge Kit (LMWEKITU) and Wireless Edge Transmitter (LMWETXU) ONLY	
Carton Contents:	(1) Wrap Around Edge - Square	(1) Wrap Around Edge - Round
Warranty:	Two Years	

Only LiftMaster Monitored Photo Eyes or Edge Sensors may be used with LiftMaster Operators to meet the 2016 UL 325 Standards.

ADDITIONAL WIRELESS ACCESSORIES

Monitored Wireless Edge Kit (LMWEKITU)

- Receiver accepts up to (4) edge transmitters and each transmitter accepts up to (2) wired edges

Monitored Wireless Edge Transmitter (LMWETXU)

- Transmitter has two unique configurable open/close edge inputs for LiftMaster Monitored Resistive Edges, no one else offers this feature standard



SQUARE PROFILE



ROUND PROFILE

